


Product details


Ultra-wide-beam




Wide-beam

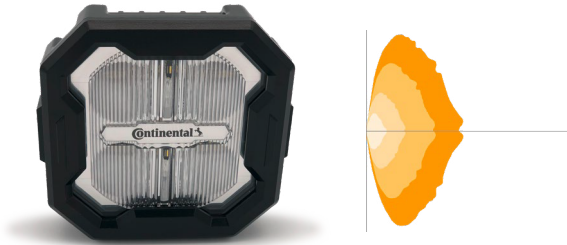

Flood-beam

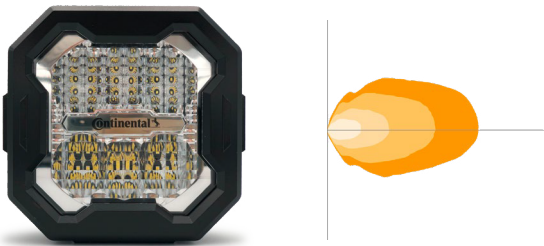

Spot-beam

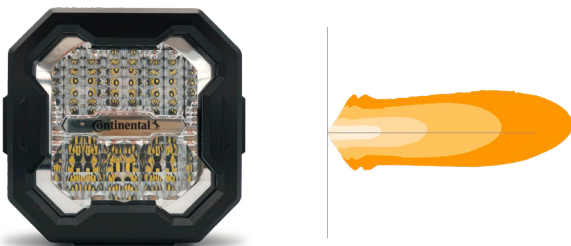

Features

- › Low portfolio complexity (one design approach) and high application diversity: Easy matrix system with four beam pattern and three performance level 1500 lm - 3500 lm (optional 4500 lm) for all applications
- › Efficient reflector lens design with 6 powerful LEDs & 4 cover lenses
- › 3 mounting possibilities - standard, heavy duty, basic/direct mount
- › Connector: integrated fitting for DT-06-2P male
- › Robust & resistant: Shatter proof polycarbonate lens to endure heavy duty application
- › Integrated driver and thermal management system
- › Made in Europe

Legal information

- › 12 V / 24 V compatible
- › Ambient temperature: - 40°C to + 90°C
- › EMC: ECE R10, CISPR25 Class 5
- › Highest IP-class: IP6K8 & IP6K9K
- › Aluminium die-cast housing with special black coating (cataphoretic painting)

Fields of application

- › Commercial / construction vehicles
- › Agriculture
- › Trucks / Bus
- › Cars
- › ATV
- › Caravans

